


Calibo DALI Rotary Switch

Typical DALI-2 wiring - active controller

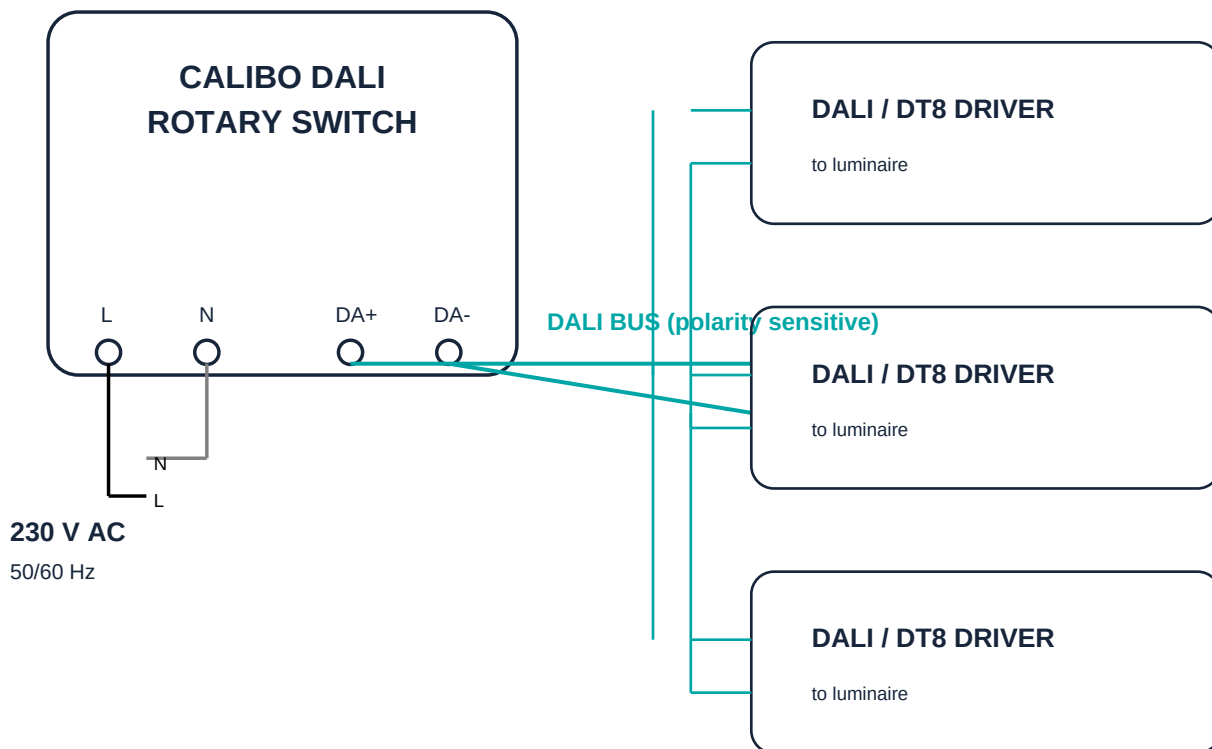

Installation notes

- At least one Calibo DALI Rotary Switch must be mains powered (active).
- One active controller supplies up to 25 DALI control gears / 52 mA.
- Maximum total DALI control-wire length: 300 m. Permitted conductor size: 1.0-2.5 mm².
- Up to four active controllers can be interconnected; observe DALI polarity throughout.
- This diagram is a system overview. Installation must follow current wiring regulations and the product instructions.